


# SURFACE MOUNT CRYSTAL UNITS (Rohs Compliant / Lead Free) Ceramic Crystal SMD5x3.2mm (AP2-SMD05 Series)



## - SPECIFICATIONS


FREQUENCY RANGE		8.0MHz TO 54.000 MHz
MODE OF OSCILLATION	FUNDAMENTAL	8.0MHz TO 54.000 MHz
FREQUENCY TOLERANCE AT 25°C		±50PPM STANDARD <±50PPM ARE AVAILABLE
FREQUENCY STABILITY OVER TEMPERATURE RANGE		±50PPM STANDARD <±50PPM ARE AVAILABLE
OPERATING TEMPERATURE RANGE		-10°C TO +70°C STANDARD -40°C TO +85°C EXTENDED
STORAGE TEMPERATURE RANGE		-40°C TO +85°C
SHUNT CAPACITANCE		7pF MAXIMUM
LOAD CAPACITANCE		8pF TO SERIES OR SPECIFIED
EQUIVALENT SERIES RESISTANCE (ESR)		SEE TABLE
DRIVE LEVEL		10 TO 300µW
AGING PER YEAR		±5PPM MAXIMUM STANDARD <±5PPM ON REQUEST




## - Equivalent Series Resistance (ESR) and Mode Of Vibration (Mode)

Frequency Range (MHz)	ESR max.	Mode
8.000 to 19.999	80	Fundamental
20.000 to 29.999	70	Fundamental
30.000 to 54.000	50	Fundamental


## - SOLDER REFLOW PROFILE

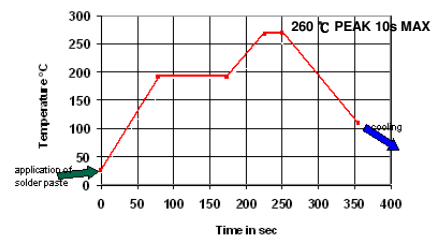

## - OUTLINE DIMENSIONS

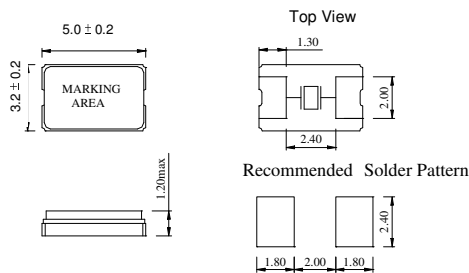

## - CARRIER TAPE DIMENSIONS (1,000 pcs/reel)

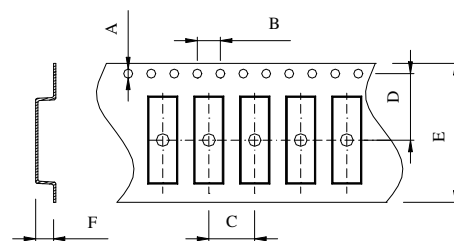

A	B	C	D	E	F
1.5 ± 0.1	4.0 ± 0.1	8.0 ± 0.1	5.5 ± 0.1	16.0 ± 0.3	1.5 ± 0.1

Unit: mm

ORDERING CODE SYSTEM (VERSION 1.1 UPDATED MAY 2008)					EXAMPLE:
SERIES	FREQUENCY	LOAD CAPACITANCE	TEMPERATURE RANGE	TOLERANCE/STABILITY	AP2-SMD05-12-12X-2020
AP2-SMD05	IN MHZ	8pF TO SERIES OR SPECIFIED	X: EXT.TEMP.-40 TO +85°C BLANK: STANDARD	2020: PPM/PPM BLANK: STANDARD	

NON STANDARD FREQUENCIES AND SPECIFICATIONS ARE AVAILABLE ON REQUEST

ActPro Ltd. (APX-Crystal)  
PROREP  
EDGE Meditronics PTE Ltd.

HONG KONG  
FRANCE  
SINGAPORE

Email: [sales@apx-crystal.com](mailto:sales@apx-crystal.com)  
Email: [sales@prorep.fr](mailto:sales@prorep.fr)  
Email: [sales@edgemeditronics.com.sg](mailto:sales@edgemeditronics.com.sg)

Internet: [www.apx-crystal.com](http://www.apx-crystal.com)  
Internet: [www.prorep.fr](http://www.prorep.fr)  
Internet: [www.edgemeditronics.com.sg](http://www.edgemeditronics.com.sg)

Tel: 852-3625 2368 Fax: 852-2633 8503  
Tel: 33-1-4812 1736 Fax: 33-1-4812 1739  
Tel: 65-6455 0521 Fax: 65-6455 0857

Specifications are subject to change without notice